



## NP-15

### MAIN FEATURES


- Up to 15 picks per minute
- Up to 120lbs payload
- Minimal ceiling requirement 100”
- Automatic pallet staging and discharge
- Pallet magazine holding up to 15 pallets with automated feed system
- Slip sheet placement available
- Cold room friendly
- Stainless steel frame STANDARD
- Complete wash-down design available



# NP-15

## "POLARIS" PALLETIZER

*Out of this world performance and value!*

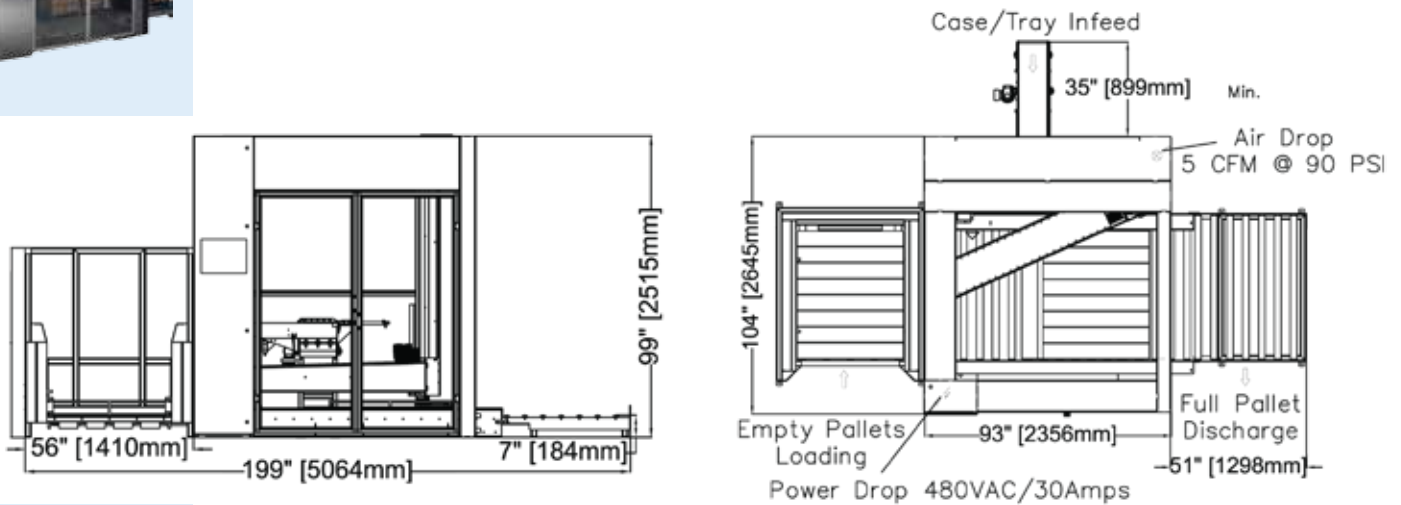

### SPECIFICATIONS:

DRIVE:	AC motor case transfer, servo drives (4-axis loader)
SPEED:	POLARIS NP: Up to 15 picks per minute
PRODUCT SIZE RANGE:	Per Project Specification
CASE SIZE RANGE:	POLARIS NP Length: 5" (127mm) - 24" (610mm) Width: 5" (127mm) - 24" (610mm) Height: 1" (25.5mm) - 20" (508mm)
PALLET SIZE:	Width: 48" (1,219 mm.) max. , Length: 48" (1,219 mm.) max.
PAYLOAD:	up to 55 kg (120 lb) (multiple case pick up)
STACKING HEIGHT:	65" standard height (extension available)
MAGAZINE CAPACITY:	15 pallets
FRAME:	Stainless Steel Construction
GUARDING:	Anodized Aluminum and Polycarbonate guarding interlocked with door safety switches covering all moving parts. Motorized roll up curtain at loaded pallet discharge
FINISH:	All parts in contact with product are stainless steel, anodized aluminum or plastic
ELECTRICAL:	- Schneider Electric - Touch screen HMI - 3-color stackable warninglights - NEMA 12 wiring and enclosures
PNEUMATICS:	"FESTO"
INSTALLATION REQUIREMENTS:	Power: 480 VAC, 30 AMPS, 3 Phase. Control voltage 24VDC. Air: 90 PSI, 5 cfm



1111 Flint Road, Unit 29, Toronto  
Ontario, Canada, M3J 3C7  
Tel: (416) 663 7071  
www.nuspark.com

**Distributed by**