





NRCP-5

MAIN FEATURES

- 2 in 1 operation - erect and load on one frame
- Industrial robot - with multipurpose gripper
- Up to 5 cases per minute
- Tape or Glue Case Compatible
- Tool-less changeover - under 10 minutes
- Economic footprint
- Stainless Steel Frame STANDARD
- Heavy Payload capability, up to 100lbs

NRCP-5 ROBOTIC CASE PACKER

Unparalleled Flexibility

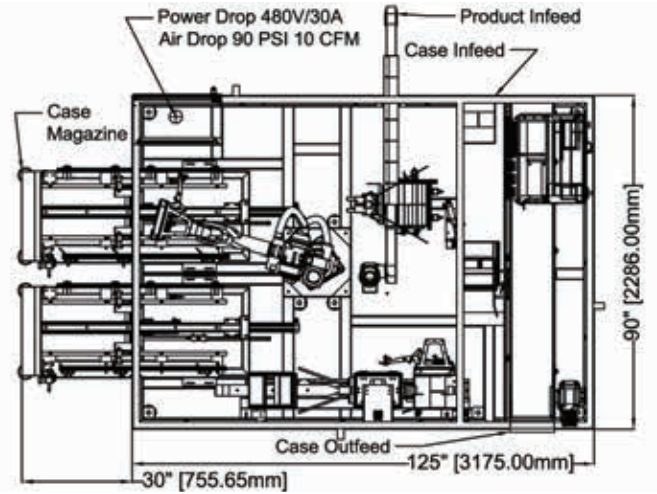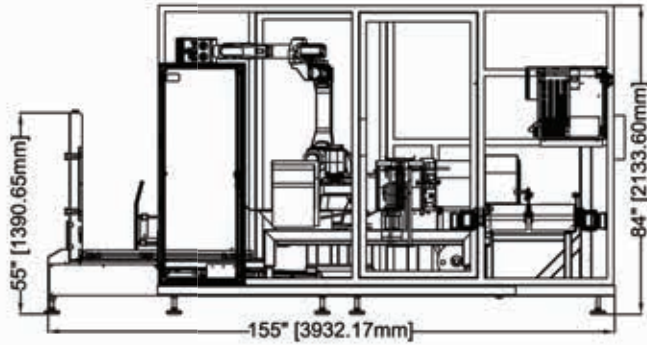

SPECIFICATIONS:

ROBOT:	Industrial robot – 6 axis
DRIVE:	AC motors (conveyors)
SPEED:	Up to 5 cases per minute
CASE SIZE RANGE:	Length: 6" (152mm) - 24" (610mm) Width: 5" (127mm) - 16" (406mm) Height: 4" (100mm) - 16" (406mm)
ADJUSTMENTS:	Hand knobs with position pointers and scales
CASE SEALING:	Single Tape Heads (2" or 3" tape) or "Nordson" Glue system
MAGAZINE CAPACITY:	3 ft. (~120 cases), Second magazine available as option
FRAME:	Stainless Steel construction
GUARDING:	- Epoxy coated steel mesh guarding interlocked with door safety switches - Optional Anodized Aluminum and Polycarbonate guarding interlocked with door safety switches - Optional stainless steel with Polycarbonate guarding
ELECTRICAL:	- Omron, Schneider Electric, Allen Bradley - Touch screen HMI - NEMA 12 wiring and enclosures - 3-Color stackable warning lights
PNEUMATICS:	"FESTO", "SMC"
INSTALLATION REQUIREMENTS:	Power: 480 VAC/30 Amps. 3 phase, 50/60 Hz Air: 90 PSI, 10 cfm



1111 Flint Road, Unit 29, Toronto
Ontario, Canada, M3J 3C7
Tel: (416) 663 7071
www.nuspark.com

Distributed by